


Specifications

Core: Multi-Strand PMMA Fiber
Outer Jacket: Transparent PVC cladding
Outside Diameter (O.D.): 3.5mm, 3.8mm, 5.2mm
Spool Length: See chart below
Bend Radius: Minimum 6 x fiber diameter
Acceptance Angle: 60°
Numeric Aperture: 0.60
Attenuation: Less than 1.6% per foot
Operating Temperature Range:
 Minimum -67°F (-55°C)
 Maximum 158°F (70°C)

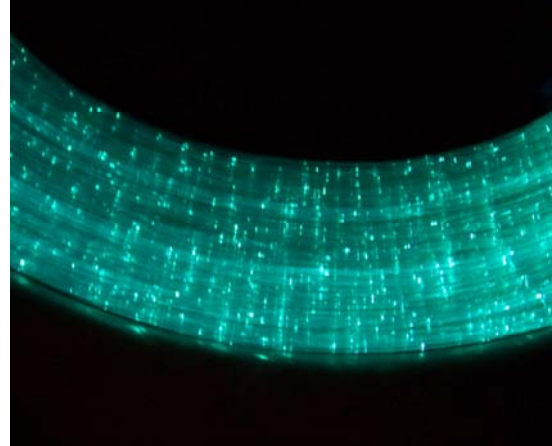

The Sparkle fiber is 0.75mm PMMA fiber with a clear PVC cladding for UV protection. The fiber is distressed at 3cm intervals, allowing a "sparkle" effect to be created.

The fiber cable is available from 3.5mm – 5.2mm diameter. Spool lengths 100, 200 and 500 feet.

Applications

- Chandeliers
- Special Effects
- Waterfall Curtain

| Catalog No. | Description | Diameter | Length |
|--------------|------------------|----------|----------------------|
| MOFSSS-3x75 | 3 x 75mm fibers | 3.5mm | 100, 200 or 500 feet |
| MOFSSS-7x75 | 7 x 75mm fibers | 3.8mm | 100, 200 or 500 feet |
| MOFSSS-14x75 | 14 x 75mm fibers | 5.2mm | 100, 200 or 500 feet |

Ordering Example: MOFSSS-3-75-500